



YLI ELECTRONIC

Infrared Sensor Exit Button




Model: ISK-841C



Specification

- Size: 86Lx86Wx25.7H(mm)
- Input : DC12V
- Contact rating: 1A@30VDC,0.5A@125VAC
- Output contact: NO\NC\COM
- Mechanical life: 1,000,000 tests
- Suitable for door: Hollow Door
- Detection range: 4-10cm(Adjustable)
- Time delay: 0.5~25s(Adjustable)
- Operating temp: -20°C ~+55°C(14-131F)
- Suitable humidity: 0-95% (relative humidity)
- LED Indicator:
 - White LED indicator: Power OFF
 - Red LED indicator: Power ON(standby)
 - Green LED indicator: Power ON(sensation)
- Material: Stainless
- Weight: 0.2kg

Installation & Size

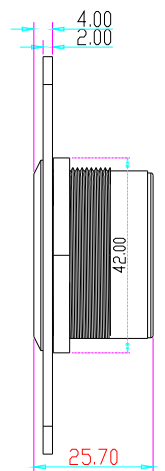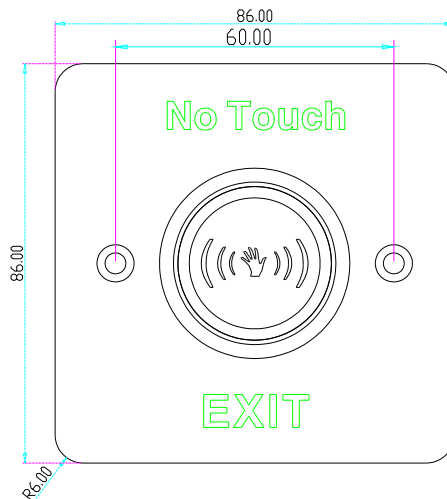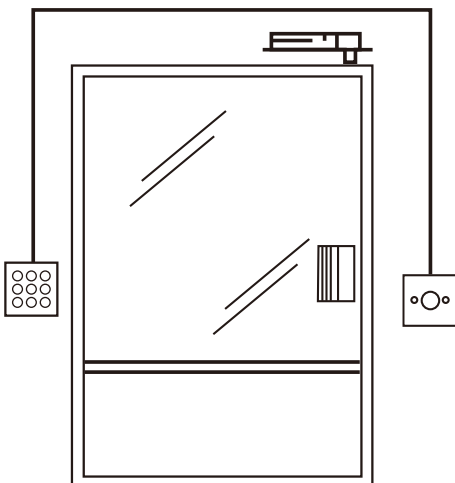


Wiring Diagram

Detection range: 4-10cm(Adjustable)

VR1 illustration:

- ⊕ The Farthest distance
- ⊕ The Nearest distance

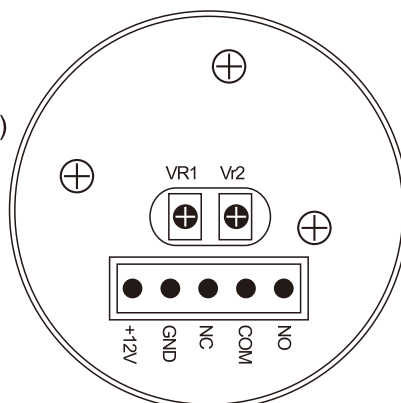

Time delay:0.5S~25S

VR2 illustration:

- ⊕ Min.time delay
- ⊕ Max.time delay