


AVerMedia

AVerDiGi NV9000E D1 Real-Time Hybrid DVR



Application Diagram

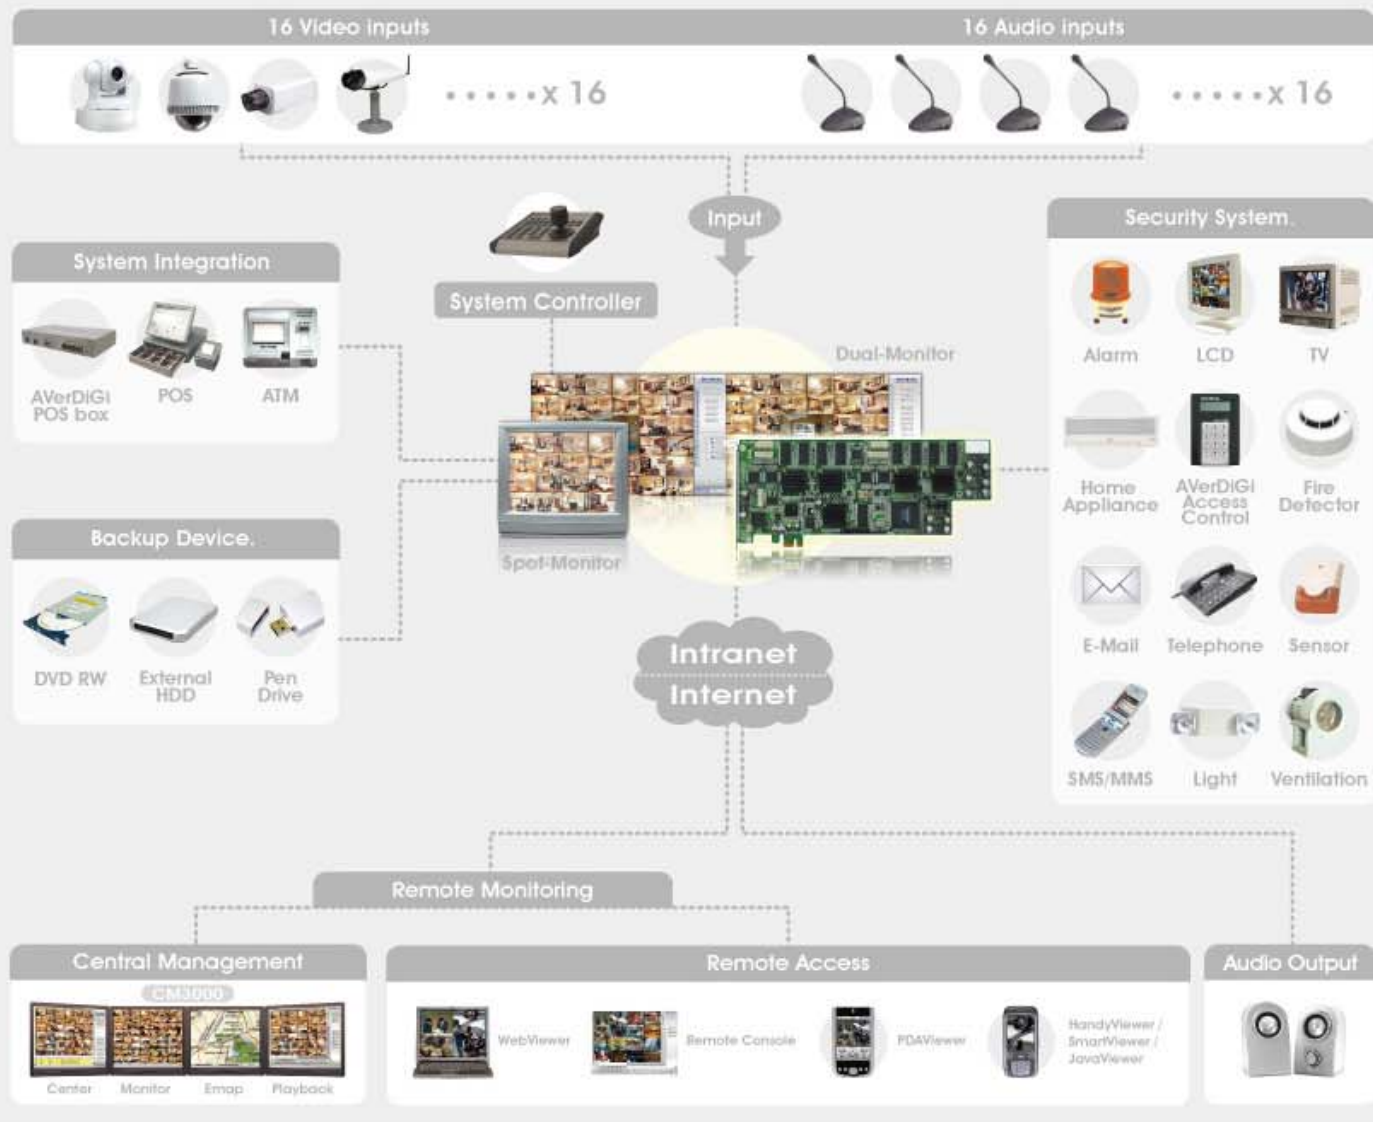

Product Features

Item	NV9000E	
Operating System	Windows XP/ Vista	
Interface	PCI-Express x 1	
Video Compression	Hardware Compression	
Video Format	MPEG4	
Video Resolution	NTSC:352x240, 720x480	
(full de-Interlace filter)	PAL:352x240, 720x576	
Display Frame Rate (NTSC/PAL)	480/400 fps (D1)	
Recording Frame Rate	480/400 fps (CIF)	
(NTSC/PAL)	480/400 fps (D1)	
Video Card (stackable structure)	1	2 (coming soon)
Video Input	16	32
Audio Input / Output	16 / 1	32 / 1
Sensor Input / Relay Out	4 / 4	8 / 8
IP cam Support	AXIS, SONY, Panasonic, Arecont, Mobotix, BOSCH, IQinvision, JVC, TOSHIBA, VIVOTEK, ACTI, D-Link, PIXORD, PELCO, Apron, Liliin and more	
Remote Access	CMS, Remote Console, WebViewer, PDAViewer, HandyViewer, JavaViewer, SmartViewer, IDispatch, etc.	
TV output	YES (Supports both IP camera and analog camera TV output)	
Dimensions	109.5(W) x 255(D) mm	

Specifications are subject to change without prior notice



All right reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means (Electronic, mechanical, photocopy, recording, or otherwise) without the written permission of AVerMedia INFORMATION, Inc. Information in this document is subject to change without notice. The information contained herein, is to be considered for informational purposes only and shall not be considered legally binding. 2008 by AVerMedia INFORMATION, Inc. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form by any means without the written permission of AVerMedia INFORMATION, Inc. AVerMedia is registered trademarks of AVerMedia INFORMATION, Inc. All other trademarks belong to their respective companies. Made in Taiwan.20080618

AVerMedia®

www.avermedia.com
www.averdigi.com