

ACCTM ES 8-Port Appliance



Avigilon Control CenterTM (ACC) ES 8-port (8P) Appliance is the latest innovative addition to the ACC ecosystem providing a cost effective, analytics-ready, secure and flexible solution for smaller size deployments. With up to 8 TB of storage and a powerful on board PoE switch, the ACC ES 8P Appliance is an easy to deploy solution that can fit many needs. The ACC ES 8P Appliance features signed and encrypted Linux[®]-based firmware providing a secure and trusted platform for distributed and internet connected deployments.

Used with the optional ACC version 7 Video Analytics Channel licenses, non-analytic IP cameras and analog encoders are enriched with Avigilon's industry-leading self-learning video analytics, pattern-based object classification and tracking technology.

KEY FEATURES

High capacity storage with 4 and 8 TB options

Provides up to 210 Mbps of total throughput

Ready for mobile connections out of the box with web endpoint technology built in

Uses Avigilon's industry leading High Definition Stream Management (HDSM)TM technology

Remote alerts provide instant notifications to any mobile device


Ready to deploy out of the box with secure Linux-based firmware

Easily installed in a rack with an optional rack-mounted tray with sliding rail system

Extends self-learning video analytics to any IP video surveillance camera with the optional ACC 7 Video Analytics Channel licenses

Outline Dimensions

[X.X]	INCHES
X	MM

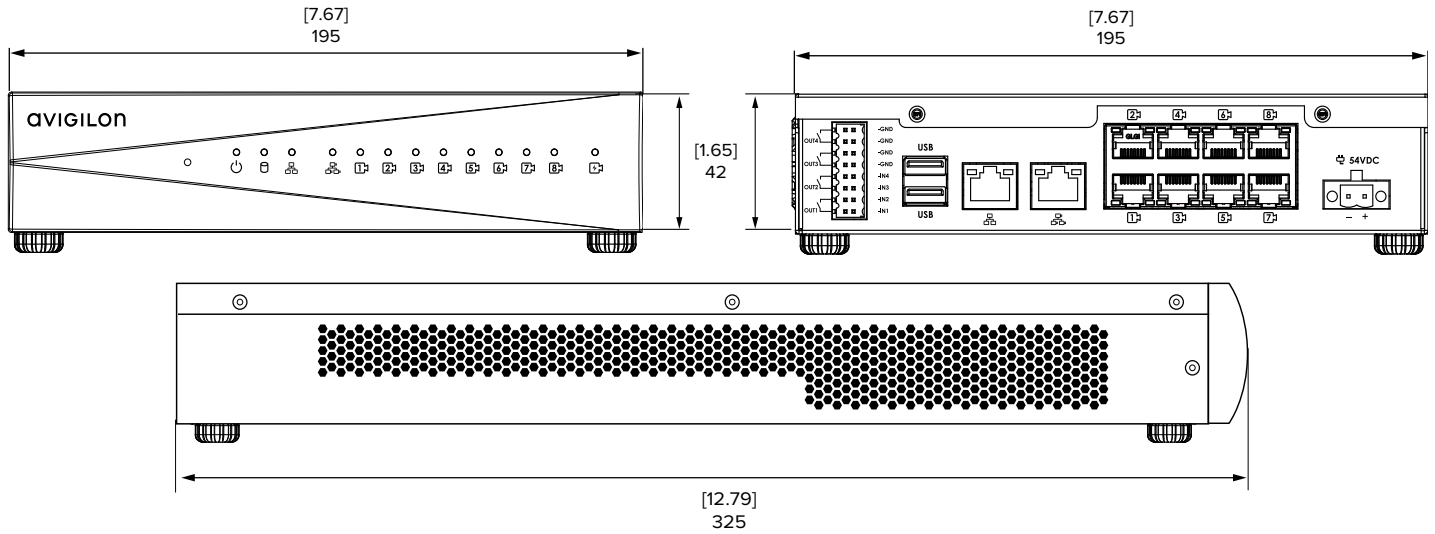

Specifications

SYSTEM	HDD Storage	1 x 3.5 inch Serial ATA hard drive (4 or 8TB)
	Recording Rate	130 Mbps
	Stream Out Rate	80 Mbps
	PoE+ Ports	8 x 10/100 Mbps (IEEE 802.3at)
	Total PoE Budget	120 W
	Uplink	2 x 1 GbE
	External I/O Terminals	4 digital inputs and 4 relay outputs
	MECHANICAL	Dimensions (LxWxH)
Weight		2.8 kg (unit); 6.17 lbs
ELECTRICAL	System Power Input	100-240VAC; 2.5A; 50-60Hz
	Power Supply	Single external, 54V
	Power Consumption	40W minimum; 180W maximum
ENVIRONMENTAL	Operating Temperature	0° C to 40° C (32° F to 104° F)
	Storage Temperature	-20° C to 60° C (-4° F to 140° F)
	Humidity	0 - 90% relative humidity (non-condensing)
ANALYTICS SUPPORT (MAX. VIDEO STREAMS PER RESOLUTION)	352 x 240 (up to 30 fps)	16
	720 x 480 (encoder NTSC mode) (up to 30 fps)	12
	1MP (up to 30 fps)	14
	2MP (up to 30 fps)	8
	3MP (15 fps 30 fps)	6 5
	5MP (15 fps 30 fps)	4 3
8MP (up to 30 fps)	2	
CERTIFICATIONS	Certifications/Directives	UL, cUL, CE, RCM
	Safety	CSA 60950-1, IEC/EN 60950-1*
	Electromagnetic Emissions	FCC Part 15 Subpart B Class B, IC ICES-003 Class B, EN 55032 Class B, EN 61000-6-3, EN 61000-3-2, EN 61000-3-3
	Electromagnetic Immunity	EN 55024, EN 61000-6-1
DEVICE TYPES² SUPPORTED FOR ANALYTICS	Avigilon HD H.264 cameras	
	Avigilon H.264 Analog Encoders	
	Avigilon HD Multisensor dome cameras	
	Avigilon PTZ cameras (analytics at Home position only)	
	ONVIF [®] cameras and encoders	
	Third-party devices (MJPEG, MPEG4, H.264) supported by ACC	

² H.265 not supported for analytics processing

Supported Video Analytics Features

Objects in Area	The event is triggered when the selected number of objects are present in the region of interest. The object can appear from within the region of interest or enter from outside.
Object Loitering	The event is triggered for each object that stays within the region of interest for an extended amount of time.
Objects Crossing Beam	The event is triggered when the specified number of objects have crossed the directional beam that is configured over the camera's field of view in the selected time period. The beam can be unidirectional or bidirectional.
Object Appears or Enters Area	The event is triggered by each object present in the region of interest. The object can appear from within the region of interest or enter from outside.
Object Not Present in Area	The event is triggered when no objects are present in the region of interest.
Objects Enter Area	The event is triggered when the specified number of objects have entered the region of interest from outside of the region.
Objects Leave Area	The event is triggered when the specified number of objects have left the region of interest.
Object Stops in Area	The event is triggered for each object in a region of interest that stops moving for the specified threshold time.
Direction Violated	The event is triggered for each object that moves in the prohibited direction of travel.
Tamper Detection	The event is triggered when the scene unexpectedly changes.

Supported ACC Features

System	<ul style="list-style-type: none"> Site support for up to 24 servers, 500 cameras and 100 defined users 		
Device Support	<ul style="list-style-type: none"> ACC-supported third-party devices Avigilon HD cameras & encoders 	Plus:	<ul style="list-style-type: none"> Avigilon HD H4Pro cameras ONVIF® compliant cameras & encoders
Client	<ul style="list-style-type: none"> Saved Views Maps Web pages 		<ul style="list-style-type: none"> Editable Site View Intelligent Virtual Matrix Collaborative investigations
Recording, Searching and Playback	<ul style="list-style-type: none"> Hourly configurable recording schedule Lossless recording Intelligent motion search Live export 		<ul style="list-style-type: none"> Thumbnail search Event search Alarm search Multi-camera export
Integrations	All 3rd party integrations via the ACC SDK	Plus:	<ul style="list-style-type: none"> CommScope iPatch® RS2 AccessIt! DDS Amadeus 5 DSX
Additional Features	<ul style="list-style-type: none"> Email event notification Digital input email trigger Manual digital output trigger Audio recording and talkdown 		<ul style="list-style-type: none"> Unlimited rule triggers Redundant recording Failover connections Alarm escalation

Ordering Information

PRODUCTS

VMA-ENVR1-8P4A	ACC ES 8-Port Appliance, 4TB. Avigilon Control Center licenses must be purchased separately.
VMA-ENVR1-8P8A	ACC ES 8-Port Appliance, 8TB. Avigilon Control Center licenses must be purchased separately.
VMA-ENVR1-8P8B ⁴	ACC ES 8-Port Appliance, 8 TB, Blue, Pre-licensed with 8 channels of Avigilon ACC-ENT ³

³ Adding ACC7-STD or ACC7-COR camera licenses to extend device connections will limit the pre-licensed ACC Enterprise channels to ACC Standard or Core edition features

ACCESSORIES

ENC-4P-H264	4-Port H.264 Video Encoder with 4 Audio Inputs and 4 Audio Outputs
PS-180W-ENVR1-8P	External Power Supply, ES 8P Appliance, 180W, No power cord
RMS1U -A-ENVR1-8P	Rackmount Shelf with Sliding Rails for ES 8P Appliance

LICENSES⁴

ACC7-VAC	ACC 7 Video Analytics Channel license
ACC7-ENT	ACC 7 Enterprise Edition Camera license
ACC7-STD	ACC 7 Standard Edition camera license
ACC7-COR	ACC 7 Core Edition camera license

⁴ Licenses are available only for users of ACC 7 software. Avigilon Multisensor cameras and analogue encoders only require one license per device.

VMA-ENVR1-8Px-NA =
VMA-ENVR1-8P8B-NA =



VMA-ENVR1-8Px-UK =
VMA-ENVR1-8P8B-UK =



VMA-ENVR1-8Px-EU =
VMA-ENVR1-8P8B-EU =



VMA-ENVR1-8Px-AU =
VMA-ENVR1-8P8B-AU =

