

## **ASSA ABLOY**

IMPRO TECHNOLOGIES

## PRIMO SOFTWARE

**SECURE:** Developed from the ground up to provide security and privacy

**CONTROL:** Local or remote multi-site management from one central

platform

INTUITIVE: Easy-to-use interface with convenient wizards and context-

sensitive help guides

**CUSTOMISABLE:** User-defined views and reports

**SCALABLE:** Designed with the future in mind, allowing for growth and

integration



## INTUITIVE USABILITY

Impro Technologies' Primo is designed with usability in mind. The wizards guide users through every step of the configuration and onboarding workflows, making the software easy to master and a pleasure to use.

## **CUSTOMISABLE SET-UP**

Primo allows users to change how they see and interact with their access control data. Operators can change table views so that they always see only what is most relevant in any view. All information can then be downloaded in the form of a report. Users have the power to create customised credential holder types, with unique attributes for each vertical. Primo thus adapts neatly and comfortably to each user's bespoke requirements.

## **SCALABILITY**

Primo is the ideal access control solution for small to medium enterprises, fitting in effortlessly with operations across systems ranging from one to 100 doors. It also grows and adapts to suit your business's changing needs. You can start small and then grow your systems and integrations over time. The software provides a free application programming interface (API) to facilitate

simple integration into other systems and services.

### **FULL OFF-LINE VALIDATION**

Impro Technologies' Primo provides full redundancy and peace of mind by allowing uninterrupted validation and access control, even when door controllers go offline. During online operations, Primo's system controllers transfer their decision-making information to door controllers. This means that when door controllers go offline, they can validate credential holders independently until the network recovers.

## FLEXIBLE HARDWARE ARCHITECTURES

Primo supports both clustering and distributed models of door management. Clustering is a centralised access control system in which doors are all managed at a central point. A distributed model involves the installation of Impro's iTRT2 controllers at each door. Choose the option that works best for you.

## **MOBILE ACCESS & BIOMETRICS**

Impro Technologies' Primo works seamlessly with mobile access and biometric hardware. It supports HID Mobile Access, finger and face biometrics with Idemia, Control ID and Hikvision.





## WHO SHOULD USE PRIMO?

Primo is ideally suited for small to medium businesses with less than 100 doors.

## **PRODUCT FEATURES:**

- Web-based
- Intuitive UX
- Customisable
- Scalable
- Security
- Off-line validation
- Mobile access
- Biometrics
- Flexible architecture
- Notifications
- Dashboards and Widgets
- Analytics
- Relationship-based access control

## **Forthcoming Features:**

Floor plans

# SPECIFICATIONS PRIMO

Ideal for new installations

IMPRO TECHNOLOGIES Perfect for existing installations

ACCESS PORTAL

PRIMO	BASIC
2025.1	V5.x

	2025.1	V5.x	
INTEGRATIONS			
API	Yes	No	
Idemia Biometrics	Yes	Yes	
Control-ID Biometrics	Yes	Yes	
Aperio Locks/Ip Hub (Enterprise Controller Required)	Yes	Yes	
HID Mobile Access	Yes	Yes	
STiD Mobile	Yes	Yes	
Hikvision Facial	Yes	Yes	
Suprema Facial	No	Yes	
HARDWARE SUPPORT			
Distributed Controller	Yes	Yes	
Cluster Controller	Yes	Yes	
Enterprise Controller	Yes	Yes	
Impro OSDP Readers (MDR-SE)	Yes	Yes	
Impro Wiegand Readers (MDR & MDR-SE Variants)	Yes	Yes	
Idemia Facial, Wave And Fingerprint Readers	Yes	Yes	
Control-ID Facial And Fingerprint Readers	Yes	Yes	
Hikvision Facial Readers	Yes	Yes	
Suprema Facial Readers	No	Yes	
SOFTWARE FEATURES			
Single Site Management	Yes	Yes	
Multi-Site Management	Yes	No	
Operator Security	Yes	Yes	
Enrolment	Yes	Yes	
Custom Credential Holder Types	Yes	Yes	
Custom Fields	Yes	Yes	
Credential Holder Import	Yes	Yes	
Access Groups, Areas & Access Time Patterns	Yes	Yes	
Anti-Pass Back & Zone Routing	Yes	Yes	
Door Management	Yes	Yes	
Device Time Patterns	Yes	Yes	
Transaction Monitoring	Yes	Yes	
Alarm Monitoring	Yes	Yes	
Hardware Monitoring	Yes	Yes	
Translations	No	Yes	
Audit log	Yes	Yes	
Mass Assignment	Yes	No	
Presets	Yes	Yes	
REPORTS			
Data Export From Every User View/Table	Yes	No	
Dedicated Reports	Yes	Yes	
Person/Asset Report	Yes	Yes	
Absenteeism Report	Yes	Yes	
Hours Worked Report	Yes	Yes	
Zone Occupancy Report	Yes	Yes	
Expired Credentials Report	Yes	Yes	
Transaction Report	Yes	Yes	
Areas Report	Yes	Yes	
Holiday Report	Yes	Yes	
Audit Report	Yes	Yes	
I '	100	100	

## LIMITS PRIMO

		Li	mits	s Primo													
Level Applied	Category	APC Max		Demo mode	APP905	APP910	APP915	APP920	APP930	APP935	APP940	APP945	APP950	APP955	APP960	APP965	APP970
Per System	Sites			1	1	2	5	10	25	25	250	250	250	250	250	250	250
	Credential holders			10	200	500	1000	2000	5000	125000	250000	250000	250000	250000	250000	500000	1000000
	Credentials			10	200	500	1000	2000	5000	250000	250000	250000	500000	1000000	1000000	1000000	1000000
	Access Groups			5	50	100	100	200	500	125000	250000	250000	500000	1000000	1000000	1000000	1000000
	Controllers			1	10	20	30	50	100	200	250	250	500	500	750	1000	1000
	Doors			2	10	20	30	50	100	200	500	1000	1500	2000	2500	5000	10000
	User Logins			1	unlimited	unlimited	unlimited	unlimited	unlimited	unlimited							
	Holidays	64	64	64	64	64	64	64	64	64							
	Expiry Reasons	30	30	30	30	30	30	30	30	30							
	API bundled	N/A	N/A		Yes	Yes	Yes	Yes	Yes				Ye	es			
Per Site	Credential holders	10000	1,000,000	10	200	500	1000	2000	5000	5000	10000/ 35000	10000/ 50000	10000/ 75000	10000/ 100000	10000/ 250000	10000/ 500000	10000/ 1000000
	Credentials	10000	1,000,000	10	200	500	1000	2000	5000	10000	10000/	10000/	10000/	10000/	10000/	10000/	10000/
											35000	50000	75000	100000	250000	500000	1000000
	Access Groups	10000	10000	5	50	100	100	100	200	5000	10000	10000	10000	10000	10000	10000	10000
	Controllers	200	248	1	10	20	30	50	100			l	20	00		l	
	Common Zones	64	64	1	10	20	30	50	64				6	54			
	Zones	64	64	1	10	20	30	50	100	200	500	1000	1500	2000	2500	5000	10000
	Doors	64	64	2	10	20	30	50	100	200	500	1000	1500	2000	2500	5000	10000
	Time Triggered Actions	512	512	1	10	20	30	50	100				20	00			
	Holidays	64	64	1			60							50			
	Access Time Patterns	128	128	2	128					128							
	Device Time Patterns	250	250	1	250					250							
	Lifts	N/A	N/A	1		10					50						
	Floors per lift	N/A	N/A	2	10	10	20	40	40	80							
	Long Messages	200	200	200	10	10	200	10	10					00			
	Visitor Follow Me	1500	1500	50			50							50			
Per Credential Holder		10000	1000000	2			25							25			
i ci ci cuciitiui iioluci	Access Groups	25	255	2			25/100*										
	Expiry Reasons	10	10	10	25/100"					25/100* 10							
Per Controller	Zones	64	64	64			64										
i ei controllei	Doors	64	64	64						64							
	Readers	64	64	64	64					64							
	Modes	64	64	64	64					64							
	Event-action combinations	8000	8000	8000	8000					8000							
	Associated outputs	512	512	512			512										
	Associated inputs	512	512	512			512			512 512							
Per Common Zone		32	32	32			32							32			
r er Common Zone	Zones	64	64	64			64							54			
Dox Door	Readers																
Per Door Per Reader	Door Mode Patterns	3	3	8			8							2 8			
Per Lift	Floors	N/A	N/A	2	10	10	20	40	40					80			
I CI LIIL	I/O modules	13	IN/A	13	10	10	13	40	70					13			
Per Floor		20	20	20			20							20			
Per Access Group	Inputs		20				10/20*							/20*			
r er Access aroup	Actions Entry Actions	10		10													
	Entry Actions	5	10	5			5/10*							10*			
Day Frant	Exit Actions	5	10	5			5/10*							10*			
Per Event	Actions	25	128	25 V			25/128*						25/				
Expiry Reason		N/A	N/A	Yes			Yes						Y	es			

## REQUIREMENTS PRIMO

HARDWARE MINIMUM REQUIREMENTS	
Primo Server	Primo Client
Intel Xeon 3.2 GHz Processor or Equivalent	Core i3 2.4GHz
4 Core CPU	8 GB RAM
16 GB RAM	10 GB available disk space
120 GB available disk space	USB 2.0 Port(s) (if MDE Card reader and/or Biometric Enrolment devices are used)
Alternative: Virtual Server Environments Supported	Screen resolution of 1920 x 1080
	Webcam for facial enrolment and crendential holder image enrolment

#### NOTE:

- · It is highly recommended to have separate servers for SQL database and the Primo Software.
- The above server specification is suitable for both the SQL database server and the Primo software server.
- These specifications will need to scale for larger systems.

SOFTWARE MINIMUM REQUIREMENTS	
Primo Server	Primo Client
Microsoft Windows 10 Professional	Microsoft Windows 10 Professional
Microsoft SQL Server 2019 Express or better	HTML5 Compliant Browser (Google Chrome recommended)
SQL Management Studio v18 or better	Local administrator rights required when printing tags or utilizing USB tag and
Microsoft .NET (Included with Installer)	Biometric enrolment devices
Local administrator rights	

#### NOTE:

• You may use an HTML5 compliant web browser on the same computer running the server application to connect to the Access Portal client. When connecting via a remote computer, see the network requirements section below.

## NETWORK REQUIREMENTS

### Communications

100Mbps Ethernet Network Interface (between Primo Hardware and Server/Clients) LAN, VPN and most properly configured WANs are supported. Static IP addresses or reserved DHCP addresses are required for all Primo hardware.

## NOTE:

· While technically possible, Primo hardware connected via the Internet is not supported at this time.

## REMOTE CLIENT CONNECTIONS

When using a remote client computer, you must be able to communicate with the server via IP address or DNS name on the assigned TCP Port (defaults listed below).

### NOTE:

When connecting over a WAN or Internet, via the client connection, you must set up your router to open and forward ports
appropriately per the chart below. Dynamic DNS for internet connected clients is useful in cases where static IPs are not possible.

### **NETWORK PORTS**


Primo utilizes both TCP and UDP protocols and requires the following ports be open:

TCP	ТСР	CONFIGURABLE	UDP	UDP	CONFIGURABLE
443	SSL Client Web Interface	Yes	10002	APC & AC(EC3)	Yes
1433	Microsoft SQL Server	Yes	10008	IP Door Controllers	No
10010	API Interface	Yes	10022	AC (EC3)	Yes
10500	Discovery Service	No	10500	Discovery Service	No
11010	IDEMIA biometrics	No			
8888	Aperio Hubs & Locks	No			
9999	Aperio Hubs & Locks	No			
80	Control ID Reader	Yes			
82	HTTP Client Web interface & API & Control ID Reader	No			

## NOTE:

• Additional network ports may be required for other integrations not listed here.

## AFTER CONTROLLER ENCRYPTION **PRIMO**

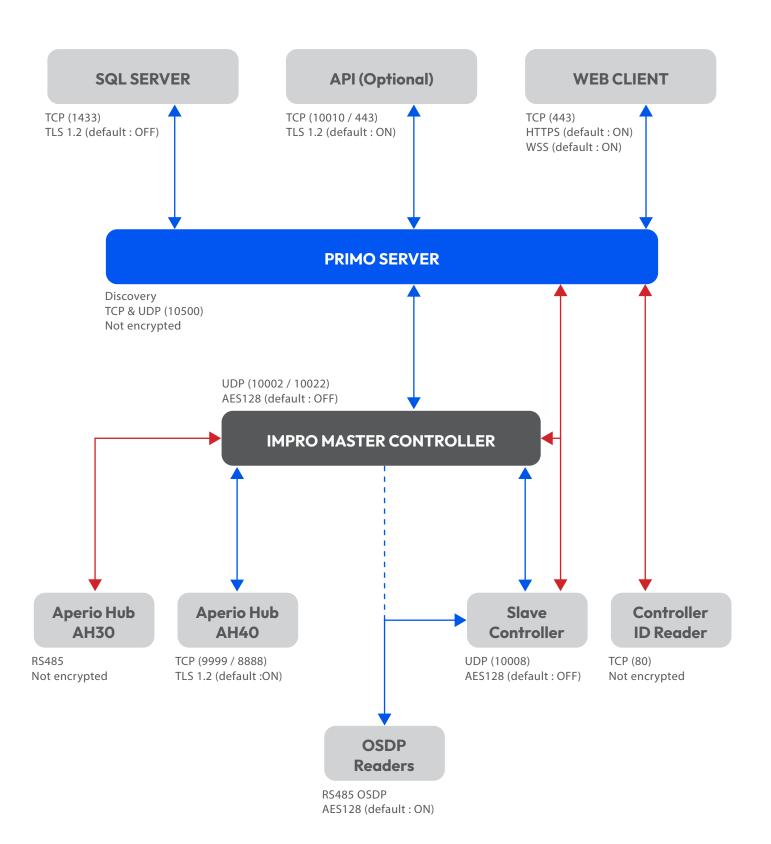



HQ tel: +27 (31) 717 0700

info@impro.net

www.impro.net

Email:

Web: