

RC3602HDM-5344

H.264 Full HD Indoor Fixed Dome IP Camera

- Remote Controllable Pan and Tilt Repositioning
- Motorized Focus
- Full Frame at 1080p
- Video Compression: H.264, MPEG-4, MJPEG
- Dual Stream
- Burnt-in Text, Video Motion Detection Support
- Two-way Audio with G.711
- 2 microSD Memory Support
- Remote Firmware Upgrade over Network
- Comprehensive SDK Support
- Embedded Intelligent Video Analytics (Planned for the future release.)




Specifications

Camera Module	
Image Sensor	1/2.7" 1080p CMOS
Effective Pixels	1920 x 1080
Scanning System	Progressive scanning
Dynamic Range	TBD (Will be tested in the future.)
Minimum Illumination	TBD (Will be tested in the future.)
Lens	3.0 – 9.0mm Vari-Focal F1.2 Motorized Focus & Zoom
Day & Night	IR Cut Filter Removal
Video	
Compression Format	H.264, MPEG-4, MJPEG
Number of Streams	Dual Stream, Configurable
Resolution	1920 x 1080, 1280 x 720, 800 x 450, 480, x 270, 320 x 180
Compression FPS	Full-frame@1080HD
Motion Detection	Built-in
Burnt-in Text	Video stream overlay text
Output	Analog video output for installation only
Audio	
Input	1 channel
Output	1 channel
Compression Format	G.711
Function	
Digital Input	1
Digital Output	1
Network	10 / 100 Base-T
Protocol	TCP/IP, UDP/IP, HTTP, RTSP, RTCP, RTP/UDP, RTP/TCP, SNTP, mDNS, UPnP, SMTP, SOCK, IGMP, DHCP, DDNS, SSL v2/v3, IEEE 802.1X, SSH, SNMP v2/v3
SD Memory Card Slot	2
USB Port	1
Electrical	
Power Source	DC12V / AC24V
Power over Ethernet	Support (IEEE 802.3af)
Power Consumption (Approx)	TBD (Will be measured in the future.)
Environmental	
Fan / Heater	Fan
Operating Temperature	TBD
Operating Humidity	Up to 85% RH, Non-condensing
Mechanical	
Material	Aluminum Die-Casting
Color	White

Dimension	Housing: 165(Φ) x 135(H) mm, Dome: 100(Φ) mm
Weight (Appr x)	TBD (Will be measured in the future.)

Dimension

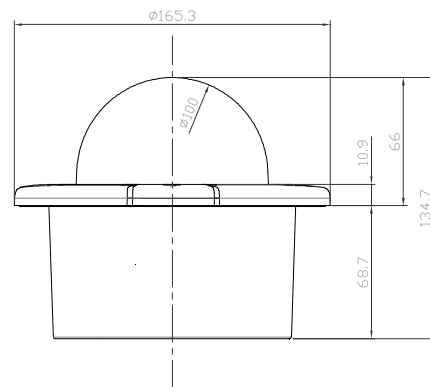

(Unit: mm)

Please Note: Datasheet Primarily Version