

RE12K

19", 1U Network Video Encoder Rack Solution

- Scalable Solution - up to 12 Video channels Per Rack
- 19" / 1U Aluminum Sub-Rack Support up to 3 Units of 4 channel Encoder Blades (Total 12 channel@D1)
- Hot-Swappable encoder Blades
- Hardware Diagnostics Include Rack Chassis Identification
- Identification of Each Sub-Rack and Each Blade Unit (for Easy and Quick Maintenance)
- Detect Power Supplier Unit Operation (Self-Diagnosing)
- Detect Fan Unit Operation (Self-Diagnosing)
- Temperature Sensor Included



Specifications


Video Encoder Rack		
Rack Construction	Aluminum 19" / 1U Sub-Rack	
Available Slots	3 ea (Hot Swappable Blades)	
Power	Input	85~264 V AC, 47~63 Hz, 2A
	Type	Single Power Supply
Fan Unit	4,500 rpm x 2 ea	
Temperature	0°C ~ 60°C (32°F ~ 140°F)	
Humidity	Up to 85% RH	
Dimension	482(W) x 44(H) x 286(D) mm	
Weight	1.80 kg + 370 g (NVC4000-R12) x 3 ea	
Power Consumption	Typically 55W Fully Loaded Rack	
Supported Blades	NVC4000-R12 (for 12 channel Rack)	

Dimension

(Unit: mm)




Rear View

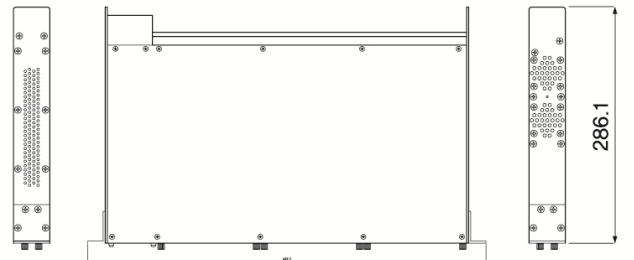

Left Side View

Top View

Right Side View

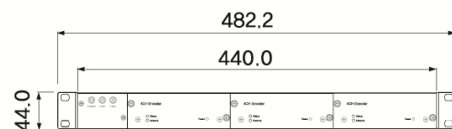

Front View